

TL30 ZOOM SPOT

ALPHA LITE LED Track Light Data Sheet

Fixture Information

- Angle adjustable
- High color rendering of CRI 90 or higher
- COB LED Chip
- All-in-one Main drive controller
- RDM network communication possible
- Maintain the last signal when DMX signal is lost
- Dimming curve selectable (Linear & curve dimming)

Optional Accessories



4 leaf barndoor



Diffuser



Honeycomb



High CRI
True Color



High TLCI
True Color



Flicker Free



Long LED
Lifetime




Shapable



Specifications

LED Chip Type	32W
Estimated LED Lifetime (hours)	50,000
White Light (K)	5600
Color Rendition (%)	97
(Optional) Dimming with Controller (%)	0-100 (Using Track Light Controller)
Beam Angle (°)	15-60 Zoomable
Signal Control	6 way Track rail DMX
(Optional) Individual Control	Dip Switch
(Optional) Supported Protocol	(Option) DMX512 with Track Light Controller
Remote Device Management	Not Supported
Channel Function	Dimming
Track Adapter	4-way / (Option) 6-way
Power Input Voltage	AC 200-240V
Power Consumption (W)	28.8
Body Dimensions (mm/inch) (DIA x L)	ø90 x 196
Body Weight (kg/lbs)	1.1 / 2.4

Dimension

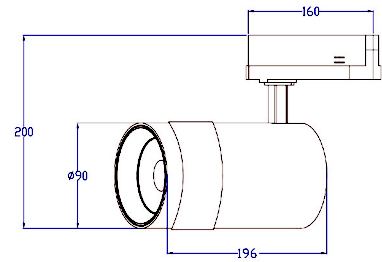

(Optional) LED Track Light Controller



WWW.ALPHA-LITE.NET

